

COMMERCIAL/INDUSTRIAL

High performance floor standing dehumidifiers

CALOREX DH 75/110

- High efficiency
- Energy recovery to air
- Quiet operation
- Air heating and through the wall option




The Calorex DH75/110 range has a wide range of applications:

- Museums
- Art galleries
- Changing rooms
- Offices
- Sports halls
- Store rooms
- Archives
- Gyms
- Unheated premises

calorex®

P E R F O R M A N C E D A T A

- High specific extraction rate, 433W/litre
- Stylish, corrosion resistant, easy to clean aluminium casing
- All heat exchange surfaces polyester coated
- Quiet operation
- Humidistat included
- Low temperature operation, down to 5°C
- Zero ozone depletion R407c refrigerant
- Certified to IP45
- Variable direction air outlet grille
- Through the wall models available
- Optional LPHW air heater
- Optional remote control

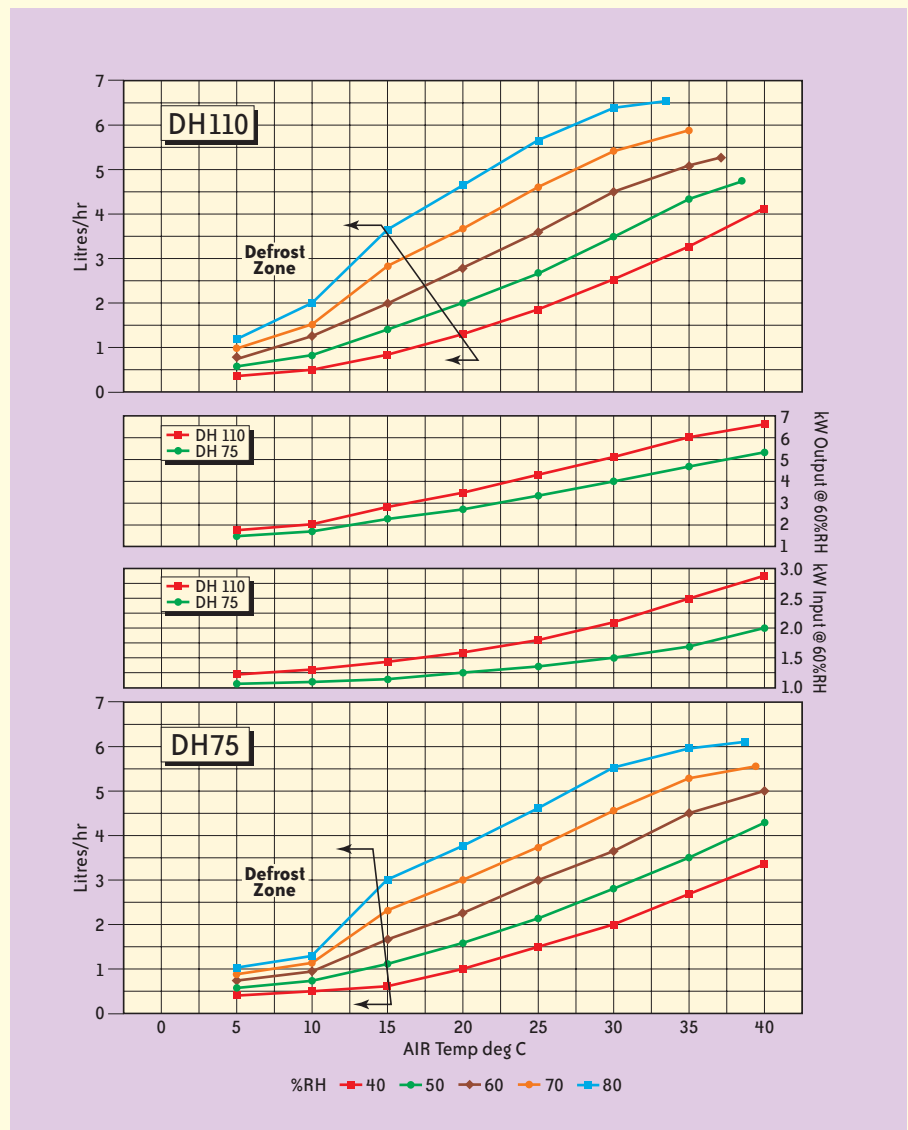

T E C H N I C A L D E T A I L S

Technical Data	Unit	DH75AX	DH110AX	DH110BX
Water removal @ 30°C/60%RH	Litre/hr	3.6	4.5	4.5
Heat recovered	kW	4.0	5.2	5.2
Air Flow	m ³ /hr	1180	1180	1180
Sound Level	dbA	53	53	53
Operating temperature range	°C	5-40	5-40	5-40
Optional LPHW air heater	kW	8.9	8.9	8.9
Condensate drain, pipe size	OD mm	15	15	15
Electrical Data		230V/1/50Hz	230V/1/50Hz	400V/3/50Hz
Nominal Running current	Amps	6.4	9.3	4.2
FLA	Amps	9.5	12	5.5
Starting current	Amps	55	66	30
Maximum Supply Fuse	Amps	13	20	10
Nominal Power Consumed	KW	1.46	2.1	2.1
Dimensions				
Width	mm	1520	1520	1520
Depth	mm	380	380	380
Height	mm	792	792	792
Weight	kg	147	148	148



CALOREX HEAT PUMPS LIMITED

The Causeway, Maldon, Essex, CM9 4XD United Kingdom
 Tel No. +44(0)1621 856611 Fax No. +44(0)1621 850871
 e.mail: sales@calorex.com web: www.calorex.com